

# PLUG & PLAY TABLE TOP

Product Code	Wattage	Input Current	Output Current
NF-PS-36W-24V-TT	36W	0.9A Max	36V
NF-PS-60W-24V-TT	60W	1.5A Max	60V
NF-PS-100W-24V-TT	100W	4.0A Max	100V




## Electrical

Output Voltage	24V DC
Input Voltage	100 - 240V AC
Efficiency	87%

## Performance

THD	< 20%
Expected Life Time	2 years

## Wiring Diagram

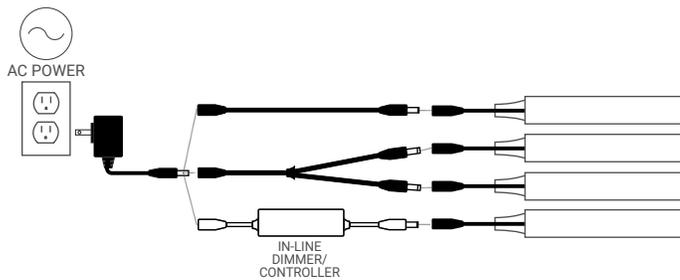


## Protection From

Over Current	Yes
Short Circuit	Yes

## Physical

Operating Temperature	0° F - 140° F (-0° C - 40° C)
Certifications	UL Approved, Class 2
Warranty	2 - 5 years (based on warranty of ribbon/neon purchased)

## Dimensions

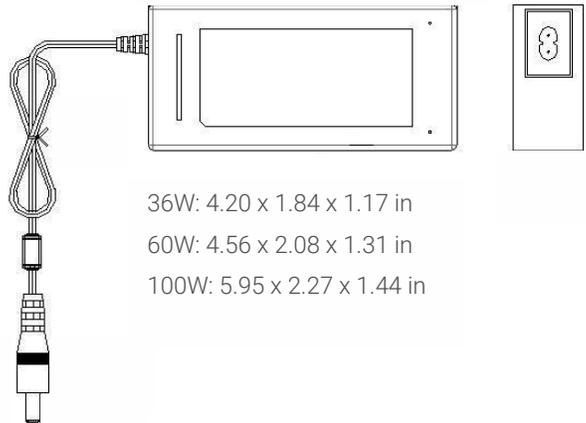

36W: 4.20 x 1.84 x 1.17 in  
 60W: 4.56 x 2.08 x 1.31 in  
 100W: 5.95 x 2.27 x 1.44 in

FOR MORE  
INFORMATION  
CLICK HERE

PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES