
35W NON-DIMMABLE DRIVER

Product Code: NF-PS-35W-24V-HW





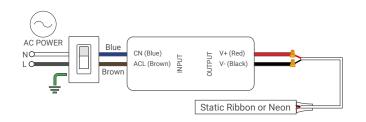

Input

Voltage Range	90 ~ 264 VAC
Frequency	47 ~ 63 Hz
Current	1.1 A / 114 VAC
Inrush Current	30 A / 115 VAC
Efficiency	85%

Protection

Over Current	110 ~ 150; Hiccup mode
Over Voltage	27.6 ~ 32.4 V
Warranty	2 - 5 years (based on warranty of ribbon/neon purchased)

Output

Voltage	24VDC
Current	1.5 A
Ripple	150 mVp-p
Line Regulation	1%
Load Regulation	2%
Turn on Delay Time	50 ms/230 VAC
Optimal Load	Up to 95%

Environment

Protection Rating	UL 1310, Class 2, IP67
Operating Temp	-4° to 113° F (-20° to 45° C)
Storage Temp	-40 ~ 176° F (-40 ~ 80° C) 10 ~ 95% HC

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

Physical

Weight	11.2 oz	
	5.83 in	
. <u>=</u> [
1.57 ii	9	
	2	
.⊑		
1.18		
		



PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES