


Item name	DiMX - Casambi DMX Controller
Ordering code	DiMX-CC
Item code	8CH-CAS-DMX
Date	19-04-2024

## DiMX - Casambi enabled DMX controller

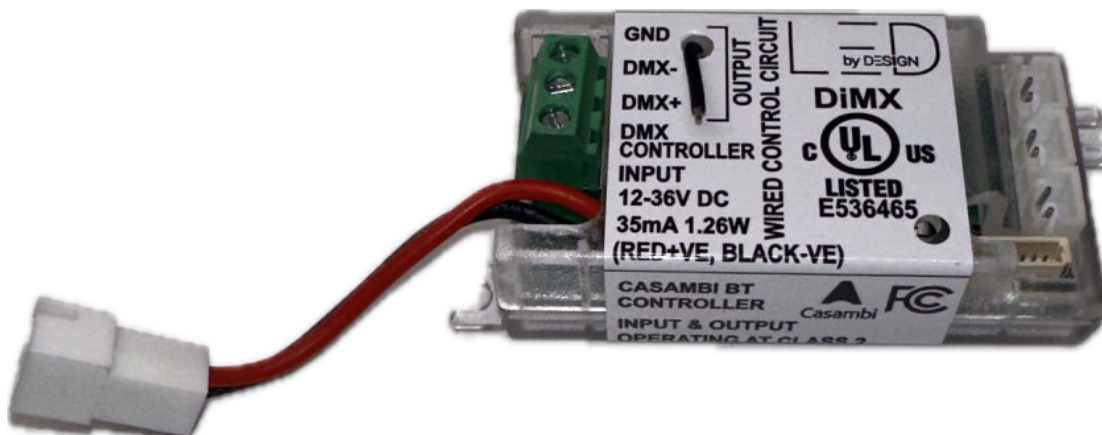

### Description

DiMX is a Casambi-enabled wireless controller of up to 8 channels DMX-512 dimmer.

DiMX enables the connection of the DMX-512 Master controller to the Casambi network.

DiMX can also be connected directly to DMX-controlled fixtures and devices such as Lumenetix CMT and ALM, each device will be controlled individually through the Casambi App.

DiMX supports RGB/RGBW/Tuneable White/ HSL.

### Control

DiMX can be controlled and configured by the Casambi free App.

Multiple DiMX devices can be used in the same area/network.


### Installation

DiMX can be installed remotely or integrated into fixtures.

Dimx works with a 12-36VDC class 2 power supply unit.

### Technical Information

Input	12-36V DC 35mA
Output	
DMX 512 signal	D+/D-/Ground
Wire Type	14-22AWG
Operating Temp	-20 to 45°C
Radio Transceiver	2.401-2.483Ghz
Size	61 x 29 x 13 mm
Size	2.4 x 1.14 x 0.5 Inches
Weight	20g
Protocols	RGB/W & HSL
Installation	Remote or integrated
Certificates	CE, UL Approved

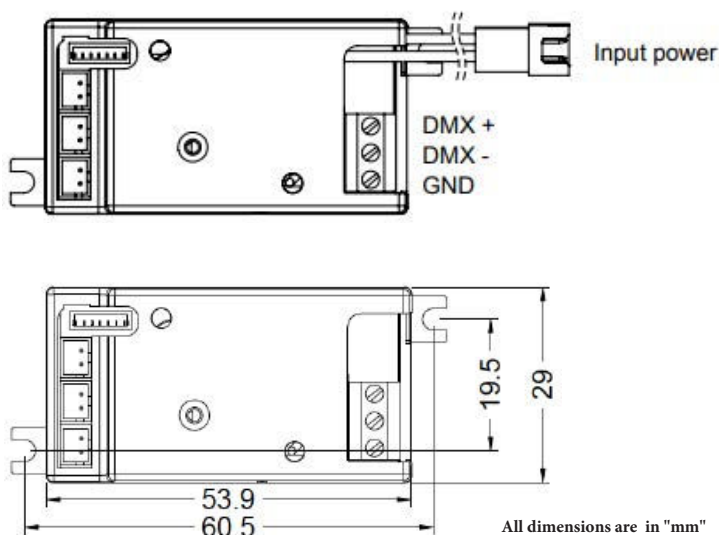

# CASAMBI

CE C UL US LISTED FC IP20



NOTES: DiMX is available with out plastic case - on request.  
Cable connector for input included

We reserve the right to change specifications without prior notification.