


PRO 120 SERIES - IP68

This LED ribbon is great for accent applications such as coves, shelving and toe-kicks, which can be installed in both dry and wet locations.




| PRODUCT CODE | LUMENS/FT | EFFICACY |
|---------------------------|-----------|----------|
| NF-PRO-W-120-24V-2700K | 214 | 71 |
| NF-PRO-W-120-24V-3000K | 210 | 70 |
| NF-PRO-W-120-24V-3225K | 197 | 66 |
| NF-PRO-W-120-24V-4100K | 212 | 71 |
| NF/SP-PRO-W-120-24V-5500K | 208 | 69 |
| NF-PRO-W-120-24V-6200K | 177 | 59 |

Also available in IP65.

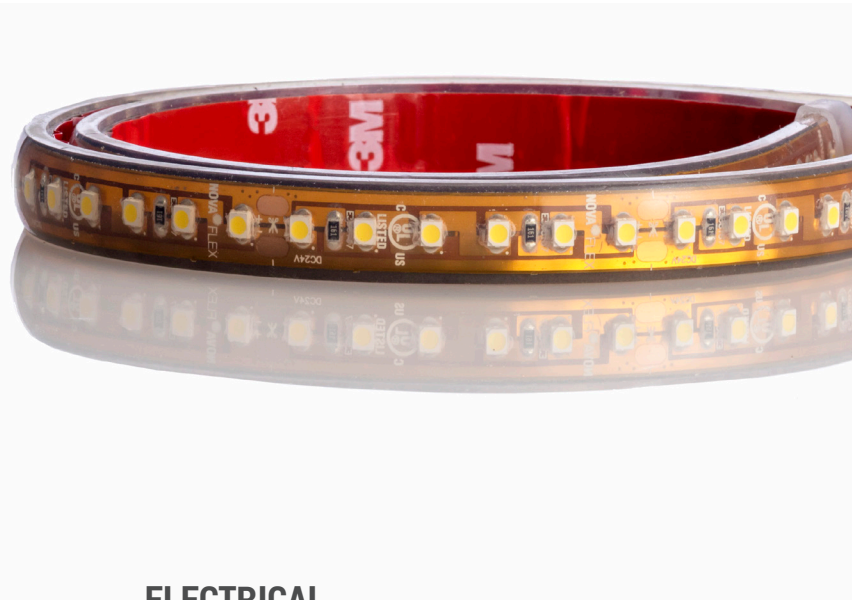

PHYSICAL

| | |
|------------------|---|
| Operating Temp | -15° F to +140° F (-26° C to +60° C) |
| Class II Max Run | 30.3 ft |
| CRI | 80+ |
| Cut Length | 2 in |
| Environment | IP68 |
| Mounting | 3M Adhesive / Clips / Channels |
| Width | 0.52 in (13.1 mm) |
| Height | 0.22 in (5.5 mm) |

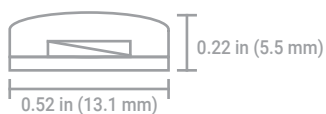

ELECTRICAL

| | |
|-------------------|----------------|
| Input Voltage | 24V DC |
| Power Consumption | 3.0 w/ft |
| LEDs/Meter | 120 |
| Lamp Life | 50,000+ hours |
| Wire Size | 20 AWG, 2 wire |
| Dimming | MLV / 0-10V |
| Certifications | UL Listed |
| Warranty | 2 years |

