


PRO 60 SERIES - IP68

This LED ribbon is great for accent applications such as coves, shelving and toe-kicks, which can be installed in both dry and wet locations.



PRODUCT CODE	LUMENS/FT	EFFICACY
NF/SP-PRO-W-60-24V-2700K	94	63
NF/SP-PRO-W-60-24V-3000K	115	77
NF/SP-PRO-W-60-24V-3225K	103	69
NF/SP-PRO-W-60-24V-4100K	101	67
NF/SP-PRO-W-60-24V-5500K	92	61
NF/SP-PRO-W-60-24V-6200K	90	60

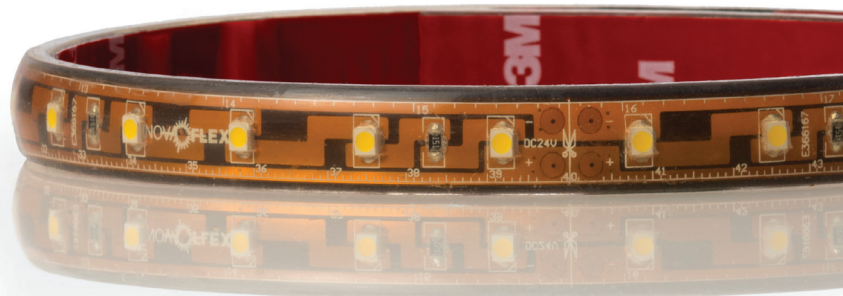

Also available in IP65.

PHYSICAL

Operating Temp	-15° F to +140° F (-26° C to +60° C)
Class II Max Run	49 ft
CRI	80+
Cut Length	4 in
Environment	IP68
Mounting	3M Adhesive / Clips / Channels
Width	0.52 in (13.1 mm)
Height	0.22 in (5.5 mm)

ELECTRICAL

Input Voltage	24V DC
Power Consumption	1.5 w/ft
LEDs/Meter	60
Lamp Life	50,000+ hours
Wire Size	20 AWG, 2 wire
Dimming	MLV / 0-10V
Certifications	UL Listed
Warranty	2 years

