


DESIGN 160 SERIES - IP68

The Nova Flex Design 160 - IP68 is an architectural grade LED ribbon / LED tape lighting that ensures proper execution of design intentions. Ribbon can be installed in both dry and wet locations.



| PRODUCT CODE | LUMENS/FT | EFFICACY |
|--------------------------|-----------|----------|
| NF/SP-DS-W-160-24V-2700K | 424 | 96 |
| NF/SP-DS-W-160-24V-3000K | 397 | 90 |
| NF/SP-DS-W-160-24V-3500K | 407 | 93 |
| NF/SP-DS-W-160-24V-4100K | 411 | 93 |
| NF/SP-DS-W-160-24V-5500K | 384 | 87 |

Also available in IP65.

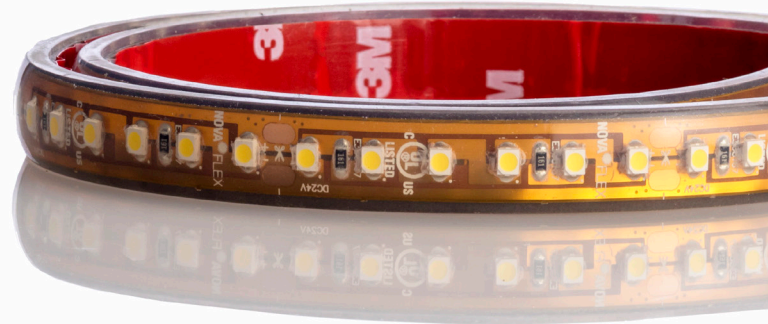

Product Shown is Pro 120 - IP68

PHYSICAL

| | |
|------------------|---|
| Operating Temp | -15° F to +140° F (-26° C to +60° C) |
| Class II Max Run | 18 ft |
| CRI | 90+ |
| Cut Length | 4.9 in |
| Environment | IP68 |
| Mounting | Adhesive / Clips / Channels |
| Width | 0.48 in (12.2 mm) |
| Height | 0.22 in (5.5 mm) |



ELECTRICAL

| | |
|-------------------|----------------|
| Input Voltage | 24V DC |
| Power Consumption | 4.4 w/ft |
| LEDs/Meter | 160 |
| Lamp Life | 50,000+ hours |
| Wire Size | 20 AWG, 2 wire |
| Dimming | MLV / 0-10V |
| Certifications | UL Listed |
| Warranty | 5 years |