


MULTI-CHANNEL DIMMABLE DRIVER NOVA FLEX[®]

Product Code: NF-PS-MAXX-288W-24V-0/10V

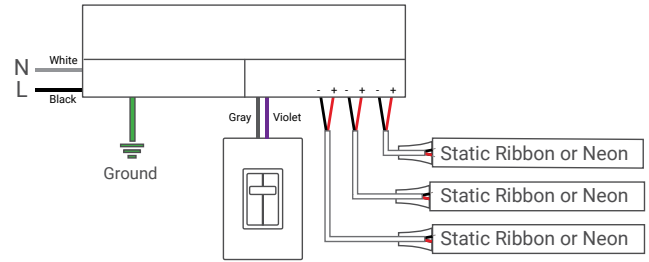

Input

Voltage Range	100 - 277 VAC
Frequency	47 / 63 Hz
Current	3.A Max
Inrush Current	35A Max @ 120 VAC
Efficiency	> 87% Max
Power Factor	0.99 @ 120 VAC
THD	< 20%

Output

Voltage	24VDC
Current	3 x 4A
Line Regulation	0.5%
Load Regulation	1%

Protection


Short Current	Yes
Over Temperature	Yes; Hiccup mode
Over Load	Yes; CC mode
Warranty	2 - 5 years (based on warranty of ribbon/neon purchased)
Protection Rating	cULus Listed

Environment

Protection Rating	UL Listed, UL 8750, UL 1310 IP65
Operating Temp	-40° to 140° F (-40° to 60°)
Storage Temp	-40° to 176° F (-40° to 80° C)

Physical

Weight	77.60 oz
--------	----------

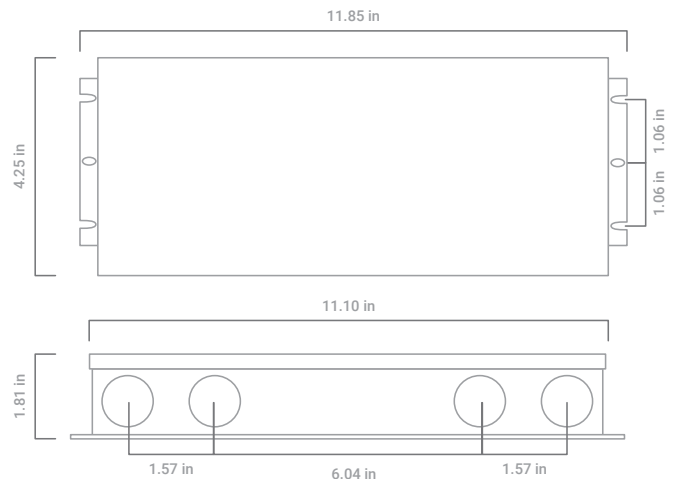

FOR MORE
INFORMATION
CLICK HERE

PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES