



- Amazing 360-degree LED neon light emits from entire silicone surface
  - *Enables unique, truly “WOW” neon fixtures*
- Multiple creative configuration and indoor mounting options
  - *Make to order, 7-9 week lead-time*
- Five static white color temperature options
- Matte-finish to minimize dust, static
- CRI90+



## THE COMPLETE ASSEMBLED SOLUTION

Project Name	
Fixture Type	Phase
Specifier	Date
SKU	SKU
SKU	SKU

## PERFORMANCE

SKU	L/ft	EFFICACY (L/W)	POWER (W/ft)	MAX RUN	LED/M
NF/SP-NEON-D-360-24V-2200K	233	53.0	4.4	16.4 ft	336
NF/SP-NEON-D-360-24V-2700K	251	57.2	4.4	16.4 ft	336
NF/SP-NEON-D-360-24V-3000K	257	58.5	4.4	16.4 ft	336
NF/SP-NEON-D-360-24V-4000K	250	56.9	4.4	16.4 ft	336
NF/SP-NEON-D-360-24V-5700K	277	63.0	4.4	16.4 ft	336

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG
Lead	8 in/200 mm
Dimming	See compatible controls on page 3


## QUALITY ASSURANCE

CCT Binning	SDCM < 3
Warranty	5 years
Certifications	cULus, RoHS, CE
Lumen Maintenance	50,000 Hrs

## PHYSICAL

Ambient Temp	13° to 120°F
Environment	INDOOR
Mounting	See Mounting Section
Diameter	.91 in
Cut Length	.47 in
Bend Radius	> 4.33 in
Max Run	16.4 ft

## LIGHT DISTRIBUTION [3000K]

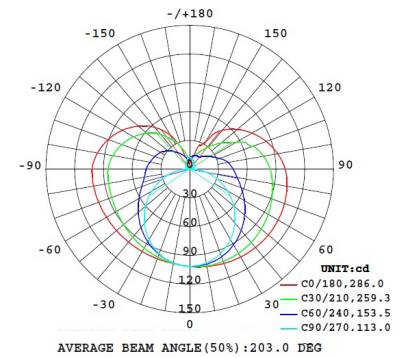





CRI/R9   3000K	98.2 / 91
Rf/Rg @ 3000K	95 / 101
Beam Angle	360°









[DOWNLOAD FULL PHOTOMETRIC DATA HERE](#)

# 360 NEON DRIVER OPTIONS

	Product Image	Product Code	Wattage	Current/Voltage	Safety	Downloads
Universal Dim / Non-Dim		NF-PS-UNV-60W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	60W	Output Current: 2.5A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-96W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	96W	Output Current: 4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-288W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	288W	Output Current: 3x4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-384W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	384W	Output Current: 4x4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
0 - 10V Dim Only		NF-PS-MAXX-30W-24V-0/10V	30W	Output Current: 1.25A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-MAXX-288W-24V-0/10V	288W	Output Current: 20A Input Voltage: 100-277 VAC	UL 7850 UL1310	<a href="#">SPEC SHEET</a>
		NF-PS-96W-24V-0/10V	96W	Output Current: 0.96A Max Input Voltage: 120-277 VAC	UL8750 Class 2	<a href="#">SPEC SHEET</a>
Lutron		NF-PS-L3DA-40W-24V-KL Lutron Hi-Lume 1% EcoSystem/3-Wire 24V	40W	Output Current: 3.3A Input Voltage: 120-277 VAC	UL8750 Class 2 Type TL	<a href="#">SPEC SHEET</a>
		NF-PS-L3DO-96W-24V Lutron Hi-Lume Premier 0.1% EcoSystem/3-Wire 24V Constant Voltage	96W	Output Current: 4.0A Input Voltage: 120-277VAC	UL8750 CSA250.13-14 Class 2	<a href="#">SPEC SHEET</a>

	Product Image	Product Code	Details	Downloads
S3i Series		<b>S3i Glass Touch-Panel</b> NF-S3i-TP-D	Required to Pair: S3i-WR-1009 Zones: 4 Power Consumption: 200ma Dimming Function: 0 - 100%	<a href="#">SPEC SHEET</a>
		<b>S3i Hand-Held Remote</b> NF-S3i-WC-D	Required to Pair: S3i-WR-1009 Zones: 6 Dimming Function: 0 - 100% Battery Operated: 3 AAA	<a href="#">SPEC SHEET</a>
		<b>S3i Push Button Wall Mount</b> NF-S3i-PB-D	Required to Pair: S3i-WR-1009 Zones: 1 Dimming Function: 0 - 100% Battery Operated: 3V (CR2025)	<a href="#">SPEC SHEET</a>
		<b>S3i Wireless Receiver</b> All controls above require this product NF-S3i-WR-1009	Output Power: 240 - 720w Output Current: 4 CH. 5A/CH Input: 12 - 36V DC Dimming: 0 - 100% Can pair with NF-A-UNV	<a href="#">SPEC SHEET</a>
Amplifier		<b>Universal Amplifier</b> NF-A-UNV	Input Voltage: 12 - 36V DC Input Signal: PWM Max Load Current: 20A (5A/4CH) Max Output Power: 240 - 720W	<a href="#">SPEC SHEET</a>

# 360 NEON ACCESSORY OPTIONS

Product Image	Product Code	Dimensions
	<b>Hardwire to Female Quick Connect Adapter</b> NF-C-F	Available Lengths: 6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, & 10ft
	<b>Hardwire to Male Quick Connect Adapter</b> NF-C-M	Available Lengths: 6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, 8ft & 10ft
	<b>Male to Female Quick Connect Adapter</b> NF-C-MF	Available Lengths: 3ft, 6ft & 10ft
	<b>Y Cable</b> 2 Male, 1 Female NF-C-Y	Total Length: 20.00 in
	<b>Y Cable</b> 4 Male, 1 Female NF-C-Y-4Y	Total Length: 20.00 in
	<b>Y Cable</b> 8 Male, 1 Female NF-C-Y-8Y	Total Length: 17.25 in
	<b>Female Quick Connect to Hardwire Adapter</b> NF-C-F/HW	1.5 x 0.5 x 0.5 in
	<b>Male Quick Connect to Hardwire Adapter</b> NF-C-M/HW	1.5 x 0.5 x 0.5 in

**FOR MORE  
INFORMATION  
CLICK HERE** 

RESOURCES

WHY NOVA FLEX

ADDITIONAL  
PRODUCT OPTIONS