

# ORDER GUIDE - COB SERIES STATIC WHITE

## COB-SWH 3.0W | NF-COB-480




PART NUMBER BUILDER:

Series	Family	Environment	Led/M	Voltage	Kelvin
NF	COB	IP20	480	24V	
					2700K
					3000K
					3500K
					4000K
					5000K
					6500K

### Notes:

1. Special Order requires lead-time of 7 - 10 weeks.

## ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

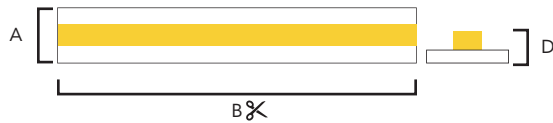

Section	IP20
A	0.31" (7.87 mm)
B	0.66" (16.76 mm)
D	0.07" (1.77 mm)

## KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	303	92.3	100	26' Ft (7.92 m)
3000K	307	91.5	100	
3500K	341	92.2	103	
4000K	326	92.2	107	
5000K	307	91.8	100	
6500K	323	91.3	106	

## PHYSICAL

Environment	IP20
Operating Temp	-4° to 140°F (-20° to 60°C)
Cut Length	0.66" Inches (16.76 mm)
Min. Bend Diameter	≥ 1.2" Inches (30.48 mm)
Max Run	26' Feet (7.92 m)

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG
Lead Wire	Quick Connect: 3" - 120" Inch
Jumper	2" Inches (50.8 mm) Minimum
Dimming	MLV   0-10V   S3i Series Controller OTHERs

## QUALITY ASSURANCE

Lumen Maintenance	54,000 Hrs
CCT Binning	3-step MacAdam
Jumper	2" Inches (50.8 mm) Minimum
Certifications	cULus   CE   Title 24   JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jul.26.24.02:47

800.595.6302

novaflexled.com