

# ORDER GUIDE - PRO SERIES TUNABLE WHITE

## NFPS TWH 1.0W-3.0W | NF-AS-120



PART NUMBER BUILDER:


Series	Adjustable	Environment	Wattage	Voltage	Length	
NF	AS	IP65	120	24V	RL10MT	- 10 Meter Reel (IP65 only)
		IP68			RL50MT	- 50 Meter Reel (IP68 only)

### Notes:

1. Lead time based on specification.
2. All Wet LED products are NOT field trimmable.

## ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

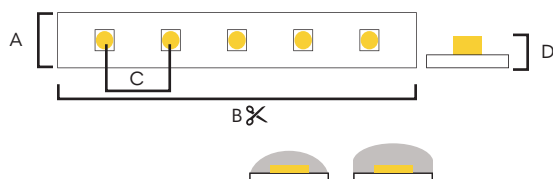

Section	IP65	IP68
A	0.40" (10.16 mm)	0.47" (11.94 mm)
B	3.93" (9.98 cm)	3.93" (9.98 cm)
C	0.31" (7.85 mm)	0.31" (7.85 mm)
D	0.14" (3.56 mm)	0.20" (5.08 mm)

## ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
3000K - 5000K	90 - 184	83.8	30 - 61	16.4' Ft (5 m)

## PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	3.93" Inches (9.98 cm)
Max Run	16.4' Feet (5 m)

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP68: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV   0-10V   S3i Series Controller OTHERs

## QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	2 years
CCT Binning	3-step MacAdam
Certifications	UL

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jul.26.24.02:10

800.595.6302

novaflexled.com