COMPATIBILITY - CHANNEL


NFDS-DPX 3.65W


NF-DS-48







SURFACE










RECESSED







ANGLED





BENDABLE





*Lead time for this configuration is 7-10 weeks

Nova Flex LED LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT FIXTURE PHASE DATE

Rev: Aug.07.24.07:33 **800.595.6302 novaflexled.com**


COMPATIBILITY - CHANNEL

NFDS-DPX 3.65W

NF-DS-48






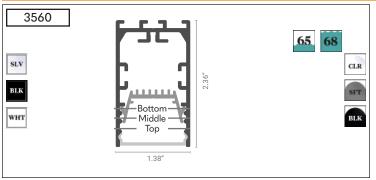





MUD-IN

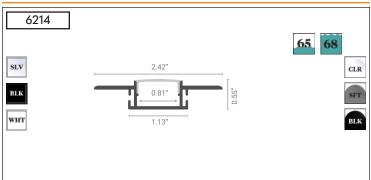

CHANNELESS



SUSPENDED



*Lead time for this configuration is 7-10 weeks

Nova Flex LED LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

DATE PROJECT FIXTURE PHASE

800.595.6302 novaflexled.com

RESOURCE - CHANNEL LENS DOTTING NFDS-RGB 4.9W NF-DS-60



Dotting with soft lens		IP65	IP68	
Angled	1919U	2	Х	0 - No Dotting
	3030 SQ/CR	1	1	
Bendable	1806	-	-	1 - Slight Dotting
	3916	2	2	
Mud-In	6214	2	2	III.I.I.I
Recessed	2515	1	X	2 - Blurred Dotting
	4540	0	0	
	6017	2	2	3 Cl D II.
Universal	2217	1	2	3 - Clear Dotting
	3560-B	0	0	X Not Compatible
	3560-M	1	1	
Suspended	3030	0	1	
Surface	1707	-	-	
	1813	2	Х	
	3525	0	0	
	4517	2	2	
Channel-less	2913	1	Х	

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program