

ORDER GUIDE - PRO SERIES STATIC WHITE

NFPS SWH 1.5W | NF-PRO-60



PART NUMBER BUILDER:


Series	Family	Environment	LEDs/M	Voltage	Temperature	Length
NF	PRO	IP65 IP68	60	24V	2500K* 2700K 3000K 3225K 4100K 5500K* 6200K*	RL10MT - 10 Meter Reel (IP65 only) RL50MT - 50 Meter Reel (IP68 only)

Notes:

- *Temperatures available with a lead time of 7 - 10 weeks
- All Wet LED products are NOT field trimmable.

ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

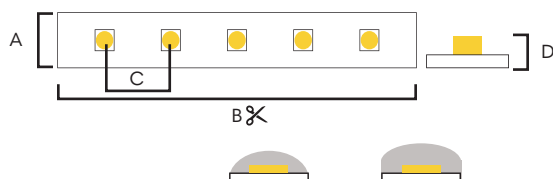

Section	IP65	IP68
A	0.40" (10.16 mm)	0.52" (13.21 mm)
B	3.93" (9.98 cm)	3.93" (9.98 cm)
C	0.65" (16.4 mm)	0.65" (16.4 mm)
D	0.14" (3.56 mm)	0.22" (5.59 mm)

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	3.93" Inches (9.98 cm)
Max Run	48.8' Feet (14.87 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP68: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2500K	89	82	57	48.8' Ft (14.87 m)
2700K	94	81	63	
3000K	115	81	77	
3225K	103	83	67	
4100K	101	84	67	
5500K	98	82	67	

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Closet Rated

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: May.01.25.03:21

800.595.6302

novaflexled.com