

ORDER GUIDE - PRO SERIES STATIC WHITE

NFPS SWH 3.0W | NF-PRO-120



PART NUMBER BUILDER:


Series	Family	Environment	LEDs/M	Voltage	Temperature	Length	
NF	PRO	IP65	120	24V	2700K	RL10MT	- 10 Meter Reel (IP65 only)
		IP68			3000K	RL50MT	- 50 Meter Reel (IP68 only)
					3225K		
					4100K		
					5500K*		
					6200K*		

Notes:

- *Temperatures available with a lead time of 7 - 10 weeks
- All IP68 LED products are NOT field trimmable.

ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

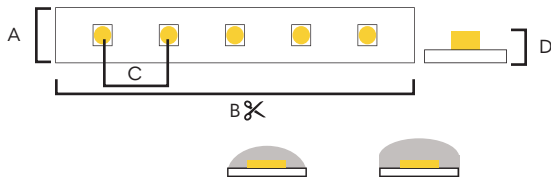

Section	IP65	IP68
A	0.40" (10.16 mm)	0.52" (13.21 mm)
B	1.96" (4.98 cm)	1.96" (4.98 cm)
C	0.32" (8.12 mm)	0.32" (8.12 mm)
D	0.14" (3.56 mm)	0.22" (5.59 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	214	80	71	30.3' Ft (9.24 m)
3000K	210	81	70	
3225K	197	83	66	
4100K	212	83	71	
5500K	208	82	69	

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	1.96" Inches (4.98 cm)
Max Run	30.3' Feet (9.24 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP68: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Closet Rated

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: May.01.25.03:32

800.595.6302

novaflexled.com