

ORDER GUIDE - PRO SERIES STATIC WHITE

NFPS SWH 5.9W | NF-PRO-240

NOVA FLEX®



PART NUMBER BUILDER:


Series	Family	Environment	LEDs/M	Voltage	Temperature	Length
NF	PRO	IP65 IP68	240	24V	2500K 2700K 3000K 3225K 4100K 5500K* 6200K*	RL10MT - 10 Meter Reel (IP65 only) RL50MT - 50 Meter Reel (IP68 only)

Notes:

1. Lead time based on specification.
2. All IP68 LED products are NOT field trimmable.

ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

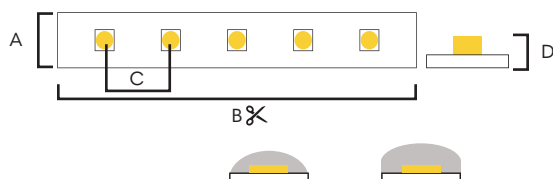

Section	IP65	IP68
A	0.55" (13.97 mm)	0.70" (17.78 mm)
B	0.98" (24.89 mm)	0.98" (24.89 mm)
C	0.32" (8.10 mm)	0.32" (8.10 mm)
D	0.14" (3.56 mm)	0.28" (7.11 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	384	81	65	15.4' Ft (4.69 m)
3000K	368	81	62	
3225K	417	84	71	
4100K	421	83	71	
5500K	407	83	69	

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	0.98" Inches (2.49 cm)
Max Run	15.4' Feet (4.69 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP68: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: May.01.25.03:51

800.595.6302

novaflexled.com